


60kW

Athena

DC Fast Charger

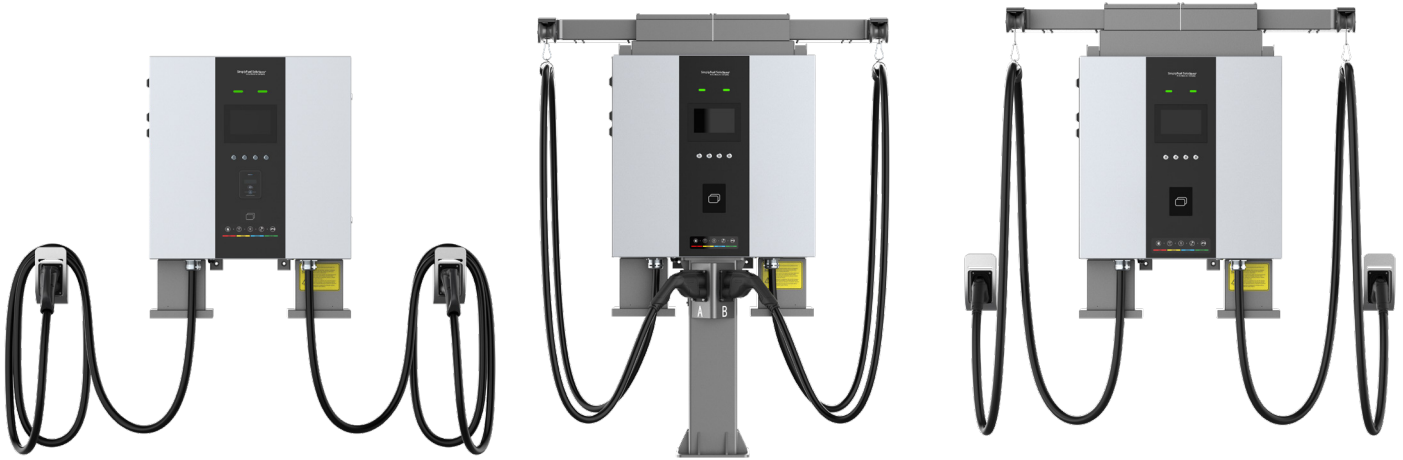

Main Features

- Over 94% peak efficiency & 200A high output current.
- Optional cable management system.

Dual Charge

Connectivity

Connectivity to any back-end based on OCPP1.6j protocol.

Space-saving

Standard wall mounted, or pole mounted installation option.

Cost-saving

No heavy equipment required for installation.

General Information	
Input Rating	480Vac±10%, 3 phases, 50/60Hz, L1+L2+L3+PE
Input Current Rating	AC 90A
Power Factor	≥0.98 @ Full Load
Efficiency	≥94% @ Full Load (Peak)
Output Interface	CCS1+CCS1
Output Power	60kW max.
Output Voltage	200-1000Vdc
Output Current	200A max./connector
User Interface	
Display	7-inch touch screen
Button and Switch	Mechanical buttons & Emergency button
RFID Reader	ISO/IEC 14443 A/B, ISO/IEC 18092, IEC/ISO 15693
Communication	
Network Interface	4G, Wi-Fi, Ethernet
Protocol (EVSE&Back end)	OCPP 1.6J
Protocol (EVSE&EV)	DIN 70121, ISO 15118
Environmental	
Operating Temperature	-22°F to 131°F (operating from 122°F)
Storage Temperature	-40°F to 158°F
Humidity	5% to 95% no condensation
Altitude	≤6561.28' above sea level
Mechanical	
NEMA enclosure	Type 3R
IK Rating	IK10 (screen is IK08)
Cooling	Forced air
Charging Cable Length	14.8 ft
Dimensions	2.46 x 2.46 x 1.25 ft (WxHxD)
Weight	Approx. 275.58 lb (excluding power modules)
Installation	Wall mounting; optional pole mounting
Certification and standards	
Standards and compliance	FCC part 15 Class A, UL 2202, UL 2231-1, UL 2231-2
Certification	TUV, FCC, Energy Star

* Cable Management System and Pole are optional.

* Cable Management System will be packaged separately from EVSE.

Contact

ejward.com/contact/